


Fiberglass (SSB1000) or Stainless Steel (SSB2000) Single Output Switch Boxes
4, 6, 8, 10 or 12 Channel Inputs

SSB1000

Fiberglass Enclosure

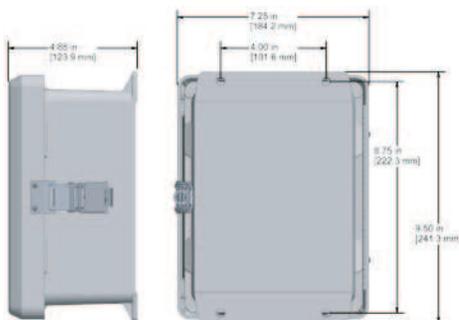

Product Features

Enclosures With DIN Rail Mountable Modules for Multiple Inputs and a Switched Output

The modules feature BNC and 2 Pin connection options to suit your preferred data collector

- Provides a switched output from remotely installed sensors to a data collector through a BNC and a 2 Pin MIL spec connector
- Accepts input from: Sensors, Proximity probes, Temperature probes
- Quick-release input terminal blocks




Steel DIN Rail Clip for Secure Attachment

Specifications

	SSB1000	SSB2000
Inputs	Terminal block 3 inputs per channel (+, -, shield)	
Switched Output	BNC jack and 2 Pin MIL	
Continuous Output	Multi-pin connector for interface with online systems (optional) Requires JB907-3A	
Rating	NEMA 4X (IP66)	
Door Closure	Snap Latch	Twist Lock
Material	Fiberglass	Stainless Steel
Temperature Rating	-58° to 180° F (-50° to 82° C)	

SSB2000

Stainless Steel Enclosure

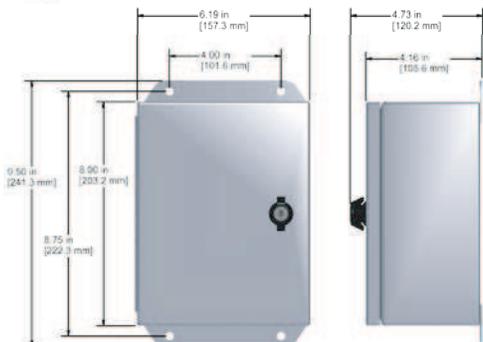

Ordering Information

SSB -

Enclosure Type
1000 = Fiberglass Enclosure
1001 = Fiberglass Enclosure, with continuous output
2000 = Stainless Steel Enclosure
2001 = Stainless Steel Enclosure, with continuous output

Channels
4 = 4 Channels
6 = 6 Channels
8 = 8 Channels
10 = 10 Channels
12 = 12 Channels

Input Options
A = *User Defined 
B = **Conduit Fitting 
C = Cord Grips 
S = *Stainless Steel Cord Grips 

Example Part Number: SSB1000-12C

Fiberglass single output switch box, 12 sensor capacity, cord grip entry

* No punch outs are provided in the enclosure for cable entry. User may install any fitting required.

** For use with rigid body conduit.

† Stainless Steel enclosure only.

Optional Accessories:

- T-Plug output connector for online systems interface.

Note: End user is responsible for providing enclosure exit when using this option.

