





Standard Cable



Armored Cable

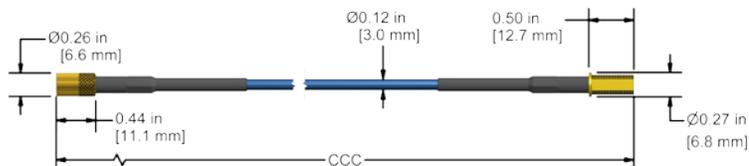

Connector Protector Option

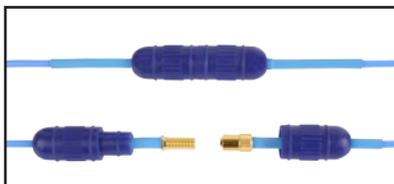

Protective Adhesive Gel Option



Product Features

PRO DC100930 extension cables combine with DP1009 series probes and DD100980 series drivers to form a complete assembly to monitor vibration and shaft position.

- Matched with PRO FFv probes and driver assemblies for cost effective and reliable measurements
- Excellent chemical resistance
- Protective sleeves to cover connections (optional)

Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
 Connector pull strength up to 70 lbs
 Matched to 5 & 7 meter system lengths
 Male & Female miniature 12-32 threaded connectors
 FEP jacketed cable, available with optional 304 stainless steel armor jacket

Ordering Information

DC100930



System Length
(REFERENCE ONLY)

50 = 5.0 meter

70 = 7.0 meter

Total Length of Extension Cable	Armor	Regulatory Approval
040 = 4.0 meter	00 = No	00 = CE Certified
045 = 4.5 meter	01 = Yes	
060 = 6.0 meter	02 = No, with connector protector	
065 = 6.5 meter	03 = Yes, with connector protector	



Example Part Number: DC100930-040-00-00
 4.0 meter total length, no armor, CE certified

