

Factory Installed Cable Connectors

F4C

4 BNC Plugs to 1 Multi-Conductor Cable

Polycarbonate Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB105, CB117, CB119



Build To Order


* Complete Technical Drawing Available on Page 137

FX90

Right Angle BNC Plug

Epoxied

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206

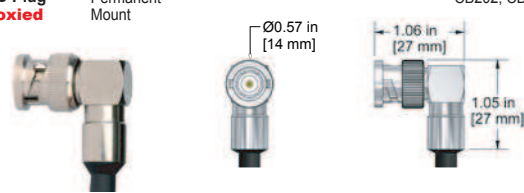

Build To Order

* Complete Technical Drawing Available on Page 137

FX92

2 Right Angle BNC Plugs to 1 Multi-Conductor Cable

Epoxied

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB105, CB112, CB117, CB212,



Build To Order

* Complete Technical Drawing Available on Page 137

FX93

3 Right Angle BNC Plugs to 1 Multi-Conductor Cable

Epoxied

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB105, CB117, CB119, CB218,




Build To Order

* Complete Technical Drawing Available on Page 137

G3H

3 Socket, Twist Lock

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+) White	250° F (121° C)	CB105, CB112, CB117, CB218

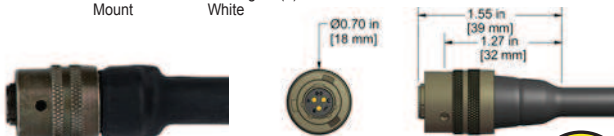

Build To Order

G4H1

4 Socket, Twist Lock

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Ch. 1 (+) B = Ch. 2 (+) C = Ch. 3 (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB218



Build To Order

J2A

2 Socket, mini-MIL

Polycarbonate Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB206



Build To Order

IP66

J4A

4 Socket, mini-MIL

Polycarbonate Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB119, CB218



Build To Order

IP66

J2C

2 Socket, mini-MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	A = Signal (+) B = Common (-)	250° F (121° C)	CB108, CB110, CB206



Build To Order

J4C

4 Socket, mini-MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB119



Build To Order

