

# Factory Installed Cable Connectors

Section 2 - Cables & Connectors

## J2N

2 Socket, mini-MIL  
Nylon Molded

Application	Pin	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB206



IP66

Build To Order

## J4N

4 Socket, mini-MIL  
Nylon Molded

Application	Pin	Max. Temp.	Compatible Cables
Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB119, CB218



IP66

Build To Order

## J2P

2 Socket, mini-MIL  
Polyurethane Molded

Application	Pin	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB206




IP66

Build To Order

## J4P

4 Socket, mini-MIL  
Polyurethane Molded

Application	Pin	Max. Temp.	Compatible Cables
Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB119, CB218

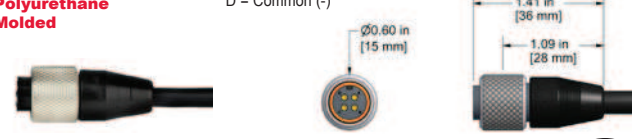


IP66

Build To Order

## K2C

2 Socket, MIL  
Polyurethane Molded

Application	Pin	Max. Temp.	Compatible Cables
Portable Measurement	A = Signal (+) B = Common (-)	250° F (121° C)	CB103, CB104, CB108, CB110, CB206

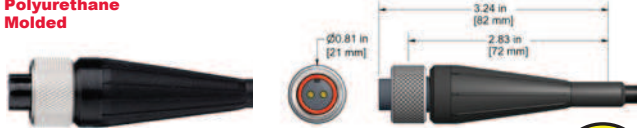


Build To Order

## M2A

5 Socket M12 with 2 Conductor Cable  
Poly-carbonate Molded

Application	Pin	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206

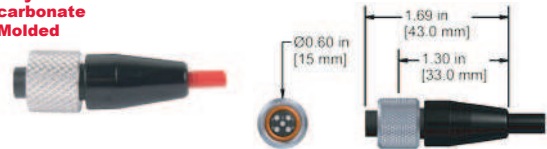


Build To Order

## M2N

5 Socket M12 with 2 Conductor Cable  
Nylon Insert Mount

Application	Pin	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206

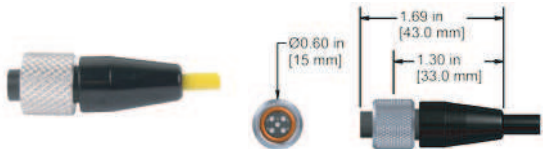

Build To Order

## M2P

5 Socket M12 with 2 Conductor Cable  
Poly-urethane Overmolded

Application	Pin	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206



Build To Order

## M4A

5 Socket M12 with 4 Conductor Cable  
Poly-carbonate Molded

Application	Pin	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB119, CB218



Build To Order

## M4N

5 Socket M12 with 4 Conductor Cable  
Nylon Insert Mount

Application	Pin	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB119, CB218



Build To Order