


Factory Installed Cable Connectors

R2C

2 Pin, MIL Poly-urethane Molded


Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206

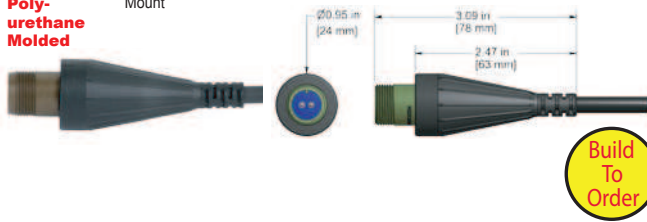

R3C

3 Pin, MIL Poly-urethane Molded


Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB105, CB112, CB117, CB119,

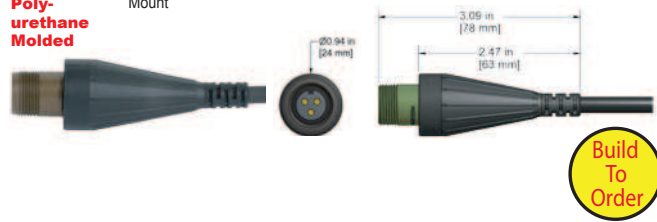

R2J

2 Pin, mini-MIL Poly-urethane Molded


Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206

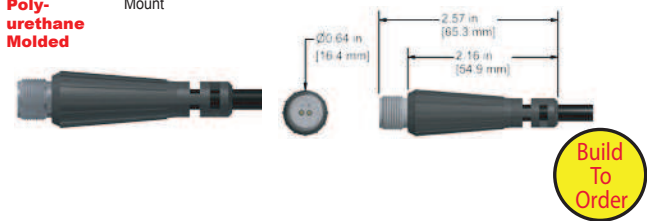

V2N

2 Socket, Viton Seal Tight Boot Nylon Insert

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB111

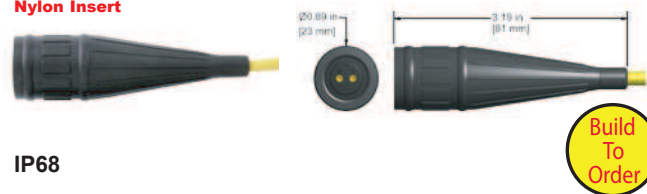


IP68

V3N

3 Socket, Viton Seal Tight Boot Nylon Insert

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB119

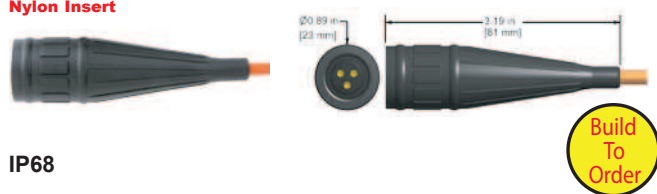


IP68

V2R

2 Socket, Viton Seal Tight Boot PPS Insert

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	350° F (177° C)	CB111

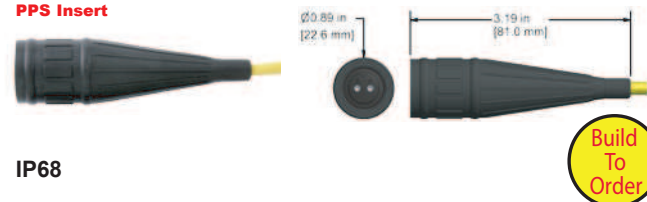


IP68

V3R

3 Socket, Viton Seal Tight Boot PPS Insert

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	350° F (177° C)	CB119

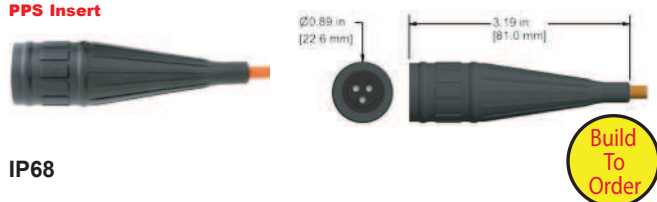


IP68

L

Tinned Leads

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	Red = Signal (+) Black = Common (-) Drain = Shield/Ground White = Axis 2 (+) (3&4 conductor cable only) Green = Axis 3 (+) (4 conductor cable only)		

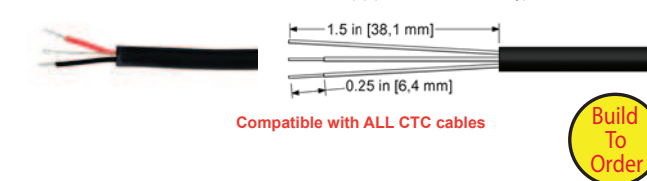

Compatible with ALL CTC cables

Z

Blunt Cut

Blunt Cut (Z) allows end user to determine exposed lead length



Compatible with ALL CTC cables

