

PRO FFv, Extension Cable




Standard Cable Shown





Armored Cable Shown



Connector Protector Option

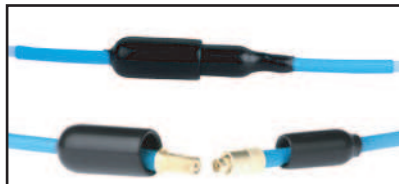

Protective Adhesive Gel Option

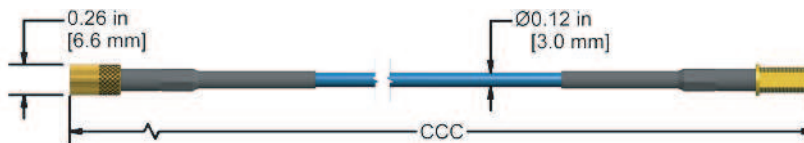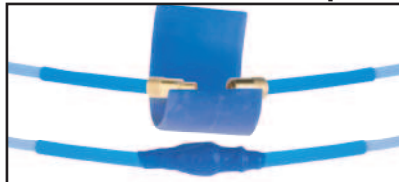

Product Features

PRO DC100930 extension cables combine with DP1009 series probes and DD100980 series drivers to form a complete assembly to monitor vibration and shaft position.

- Matched with PRO FFv probes and driver assemblies for cost effective and reliable measurements
- Excellent chemical resistance
- Protective sleeves to cover connections (optional)

Specifications

Temperature Range: -31°F (-35°C) to 350°F (177°C)
Connector pull strength up to 70 lbs.
Matched to 5 & 7 meter system lengths
Male & Female miniature 12-32 threaded connectors
Teflon [®] jacketed cable

Ordering Information

DC100930



System Length (REFERENCE ONLY)

Total Length of Extension Cable	Armor	Regulatory Approval
040 = 4.0 meter	00 = No	00 = None
045 = 4.5 meter	01 = Yes	
060 = 6.0 meter	02 = No, with connector protector	
065 = 6.5 meter	03 = Yes, with connector protector	



Example Part Number: DC100930-040-00-00

4.0 meter total length, no armor, no approvals