


**BENTLY™ 3300/3300XL COMPATIBLE Driver Assembly**

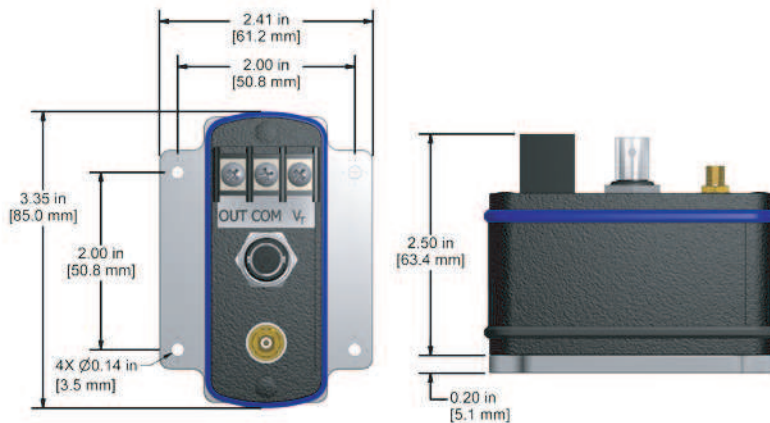

Certified

**Panel Mount Option (Shown Above)**

**Product Features**

**Driver assembly DX330180 offers multiple options for mounting and easy connections via BNC jack and screw terminals.**

- Flexible system configuration
- DC gap and shaft vibration signals available via BNC jack for analysis
- Multiple mounting options (DIN rail, panel or none)

**Specifications**

Temperature Range : - 31° F (- 35° C) to 185° F (85° C)
Linear Range - 10 to 90 mils (.25 - 2.30 mm) @ approximately -1 to -17 Vdc
Input Power/Voltage: -17.5 Vdc to -26 Vdc
<b>Aluminum Enclosure with powder coated finish</b>
Miniature 12-32 threaded connector
3 position screw terminals + BNC output

**Ordering Information**

**DX330180 -**   -

System Length	Mounting Type	Regulatory Approval
5 = 5.0 meter	0 = Panel Mounting Screws Are Not Included	00 = None
9 = 9.0 meter	1 = DIN	
	2 = None	

**Example Part Number: DX330180-91-00**  
9 meter system length, DIN mount



*Lifetime Warranty on Materials & Workmanship*