



**Bently™ Compatible FFv, Extension Cable**



**Standard Cable Shown**



**Armored Cable Shown**

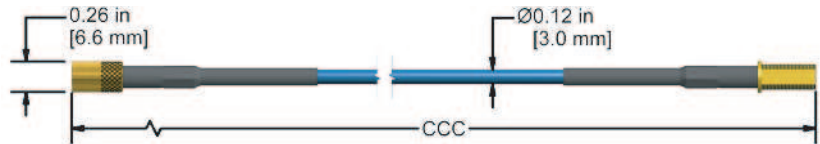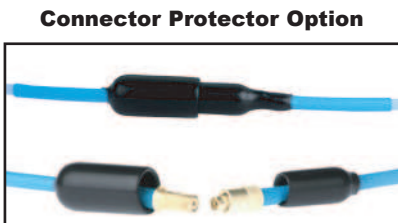

**Product Features**

**Bently™ compatible DX330930 extension cables match with DX3309 series probes and DX330980 series drivers to form a complete assembly to monitor vibration and shaft position.**

- Matched with Bently™ compatible FFv probes and driver assemblies for cost effective and reliable measurements
- Excellent chemical resistance
- Protective sleeves to cover connections (optional)

**Specifications**

Temperature Range: -31°F (-35°C) to 350°F (177°C)
Connector pull strength up to 70 lbs.
Matched to 5 & 7 meter system lengths
Male & Female miniature 12-32 threaded connectors
<b>Teflon™</b> jacketed cable

**Ordering Information**

**DX330930** - CCC - [ ] - [ ] - 00

System Length (reference only)	Total Length of Extension Cable	Armor	Regulatory Approval
50 = 5.0 meter	040 = 4.0 meter	00 = No	00 = None
70 = 7.0 meter	045 = 4.5 meter	01 = Yes	
	060 = 6.0 meter	02 = No, with connector protector	
	065 = 6.5 meter	03 = Yes, with connector protector	



**Example Part Number: DX330930-040-00-00**  
4.0 meter total length, no armor, no approvals