


**Bently™ Compatible FFv, 1/4-28 Case Thread, Eddy Current/Proximity Probe**



**Standard Cable Shown**



**Armored Cable Shown**

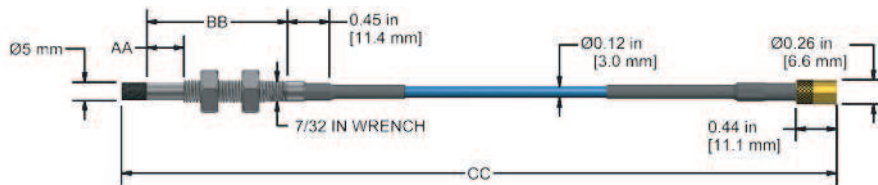

**Product Features**

**Bently™ compatible DX3309 Series FFv Probes protect fluid bearing machines, such as turbines and compressors. Proprietary design makes our probes compatible with industry standards.**

- 5 mm probe tip diameter with 1/4-28 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body and jam nuts

**Specifications**

Temperature Range: -31°F (-35°C) to 350°F (177°C)
Sensitivity: 200 mV/mil (8 V/mm) (1 mil = 0.001")
7/32 in Wrench flats at cable end of probe body
Miniature 12-32 threaded connector
Teflon® jacketed cable

**Ordering Information**

**DX3309**  -  -  -  -  -  **0 0**

Case Thread	No Thread Length	Case Length	Total Length	Connector	Regulatory Approval
01 = 1/4-28 No Armor	00 = 0.0 in    40 = 4.0 in	15 = 1.5 in    60 = 6.0 in	05 = 0.5 meter	01 = mini coax, with connector protector	00 = None
02 = 1/4-28 Armor	05 = 0.5 in    50 = 5.0 in	20 = 2.0 in    70 = 7.0 in	10 = 1.0 meter	02 = mini coax	
	10 = 1.0 in    60 = 6.0 in	30 = 3.0 in    80 = 8.0 in	50 = 5.0 meter		
	20 = 2.0 in    70 = 7.0 in	40 = 4.0 in    95 = 9.5 in	70 = 7.0 meter		
	30 = 3.0 in    80 = 8.0 in	50 = 5.0 in			
	NOTE: 0.5 in. Increments up to 1 in. less than the case length				



**Example Part Number: DX330901-05-15-05-01-00**  
 No armor, 0.5 inch no thread length, 1.5 inch case length, 0.5 meter total length, mini coax with connector protector, no approvals