


Vibration Switch Kit - VSK2000

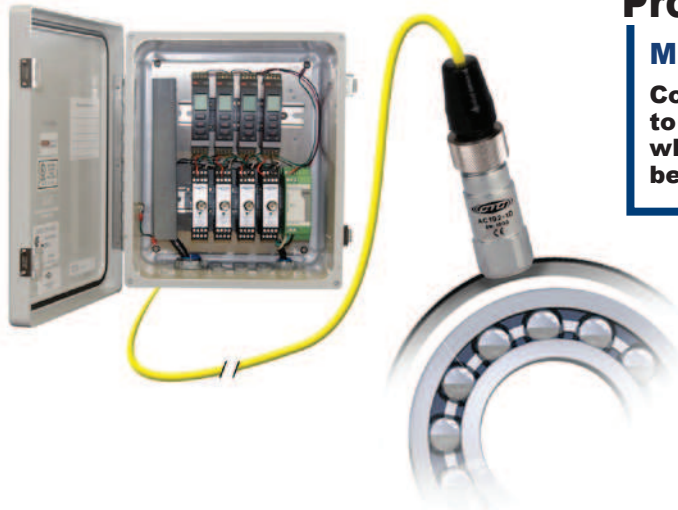

Product Features

Multi-Channel Vibration Switch

Component system allows for the accelerometer to be installed at the optimum measurement point, while the signal conditioner, relay and display can be adjusted for your application.

- PLC, DCS, SCADA connectivity
- 24/7 monitoring with shutdown alarm
- Field configurable, multi-channel
- Dynamic outputs for vibration analysis

Cooling is required if internal temperature of RXE enclosure exceeds 140°F (60°C).

RXE150

Vibration Protection & Relay System



Build
To
Order

- 24/7 protection for critical equipment for shutdown or alarm
- Accommodates up to four 4-20 mA signal conditioners and four relay units from remotely installed sensors
- For use with SC200 Series signal conditioners and RE200 Series relays (sold separately)

Cooling is required if internal temperature of RXE enclosure exceeds 140°F (60°C).

AC192 & AC194 Series

Compact, Multi-Purpose Accelerometer, 100 mV/g



Build
To
Order

- Accelerometers for analysis and process control
- Superior RF immunity
- $\pm 80g$ dynamic range, $\pm 10\%$ sensitivity


CB111-A2A

Yellow Teflon® Jacketed Cable with 2 Socket MIL



Build
To
Order

Pin Out	Application	Conductors	Shield	Wire Gauge
A = Signal (+) B = Common (-)	Permanent Monitoring	2 Conductor Twisted & Shielded Pair	Braided Shield with Drain Wire	AWG = 20

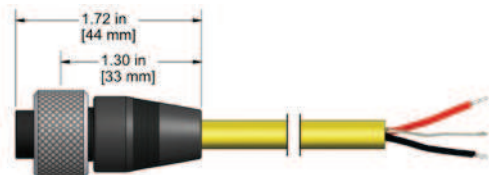

**Please Consult The Factory For Options,
or Our Part Configurator at www.ctconline.com**

Lifetime Warranty on Materials & Workmanship

www.ctconline.com