

Intrinsically Safe Loop Power Sensor, Velocity, 4-20 mA, Top Exit Flying Leads




Product Features

Continuous Monitoring in Hazardous Locations

Velocity 4-20 mA Output for Applications in Hazardous Locations

CSA and ATEX Approvals

- With 1 inch NPT conduit fitting
- Intrinsic safe applications with use of barrier
- Integral 1/4 - 18 NPT Mounting Stud

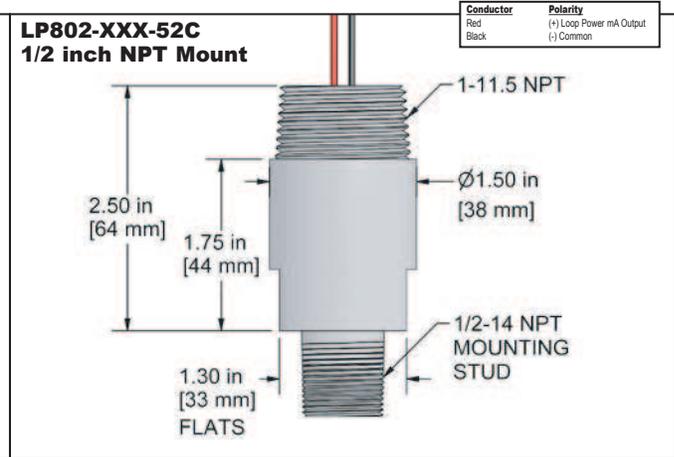

Specifications	Standard	Metric
Output, 4-20 mA	See Selection Guide	
Measurement Range		
<u>Tolerances</u>		
4 mA	(± 5%)	
20 mA	(± 10%)	
<u>Electrical</u>		
Settling Time (Turn on Time) @ Room Temp (68°F/20°C)	<60 Seconds	
Power Requirement (Loop Powered) Voltage Source	12-28 VDC	
Electrical Case Isolation	>10 ⁸ ohm	
<u>Environmental</u>		
Temperature Range	-40 to 176°F	-40 to 80°C
Electromagnetic Sensitivity	CE	
Sealing	IP68	

Specifications	Standard	Metric
<u>Physical</u>		
Sensing Element	PZT Ceramic	
Sensing Structure	Shear Mode	
Weight	12 oz	340 grams
Case Material	316L Stainless Steel	
Mounting	1/4 NPT (LP802-51C)	1/2 NPT (LP802-52C)
Connector	Flying Leads	
<u>Mechanical</u>		
Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
<u>Supplied Accessories</u>		
Calibration Certificate	Current Output @ 100 Hz	

Ordering Information

LP802 - 5 C

Measurement Range	Range Type	Frequency Range +/- 3dB	Style
0 = 0-0.5 IPS (0-12.7 mm/sec)	R = RMS P = Peak	1 = 600-60,000 CPM (10-1000 Hz)	51C = 1 inch NPT with 24 inch flying leads with 1/4 inch NPT Mount
1 = 0-1 IPS (0-25.4 mm/sec)			52C = 1 inch NPT with 24 inch flying leads and 1/2 inch NPT Mount
2 = 0-2 IPS (0-50.8 mm/sec)			
3 = 0-10 mm/sec (0-0,4 IPS)			
4 = 0-20 mm/sec (0-0,8 IPS)			



Read Before Purchasing
Important information on **Regulatory Approvals and Requirements** on Page 337 & 338



SECTION 6 - PROBING LINE