

IEC Certified (IECEX), Loop Power Sensor, Acceleration, 4-20 mA, Top Exit Flying Leads





IECEX
CE

Product Features

Continuous Monitoring in Hazardous Locations

Acceleration 4-20 mA Output for Applications in Hazardous Locations

- With 1 inch NPT fitting
- Requires Energy Limiting Barriers
- IECEX Certification

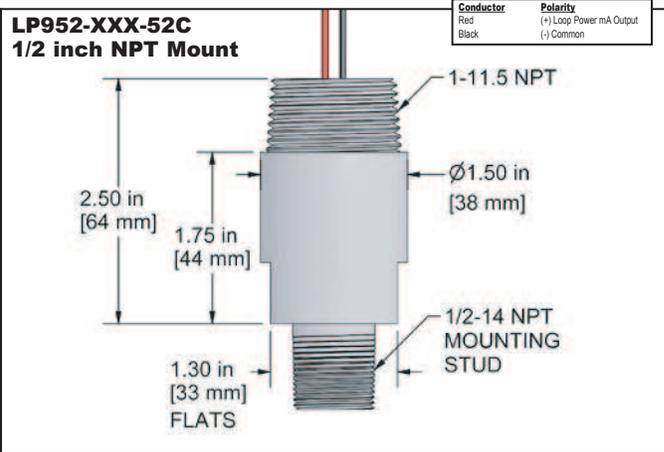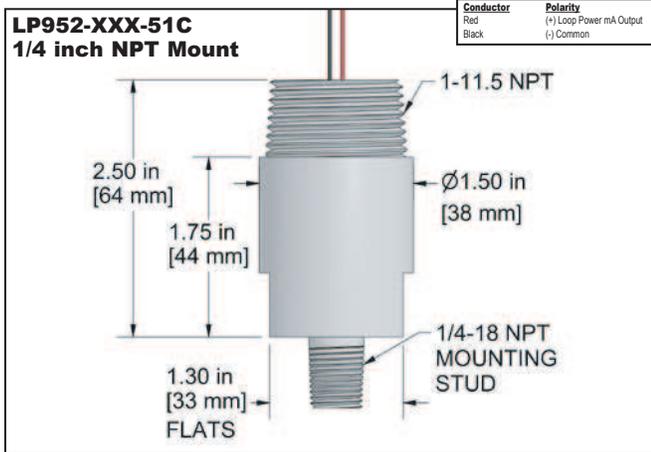

Specifications	Standard	Metric
Output, 4-20 mA	See Selection Guide	
Measurement Range		
<u>Tolerances</u>		
4 mA	(± 5%)	
20 mA	(± 10%)	
<u>Electrical</u>		
Settling Time (Turn on Time) @ Room Temp (68°F/20°C)	<60 Seconds	
Power Requirement (Loop Powered) Voltage Source	12-28 VDC	
Electrical Case Isolation	>10 ⁸ ohm	
<u>Environmental</u>		
Temperature Range	-40 to 176°F	-40 to 80°C
Electromagnetic Sensitivity	CE	
Sealing	IP68	

Specifications	Standard	Metric
<u>Physical</u>		
Sensing Element	PZT Ceramic	
Sensing Structure	Shear Mode	
Weight	12 oz	340 grams
Case Material	316L Stainless Steel	
Mounting	1/4 NPT (LP952-51C)	1/2 NPT (LP952-52C)
Connector	Flying Leads	
<u>Mechanical</u>		
Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
<u>Supplied Accessories</u>		
Calibration Certificate	Current Output @ 100 Hz	

Ordering Information

LP952 **1** **5**

Measurement Range	Range Type	Frequency Range +/- 3dB	Style
1 = 0-1g 2 = 0-2g 5 = 0-5g 10 = 0-10g 20 = 0-20g	R = RMS P = Peak	1 = 600-60,000 CPM (10-1000 Hz)	51C = 1 inch NPT with 24 inch flying leads with 1/4 inch NPT Mount 52C = 1 inch NPT with 24 inch flying leads and 1/2 inch NPT Mount



Read Before Purchasing
Important information on Regulatory Approvals and Requirements on Page 343



Lifetime Warranty on Materials & Workmanship