DSB1000/DSB2000 -

Fiberglass (DSB1000) or Stainless Steel (DSB2000) Dual Output Switch Boxes, 4, 6, or 8 Channel Inputs

DSB1000

Fiberglass Enclosure



Product Features

Enclosures With DIN Rail Mountable Modules for Multiple Dual Inputs and Switched Outputs

DIN rail mountable modules give you multiple channels of data collection. The modules feature external BNC and 2 or 3 Pin connection options to suit your preferred data collector.

- Provides a switched output from remotely installed dual output sensors to a data collector through two BNCs, or a 3 Pin MIL spec connector
- Modular design provides flexible upgrade option •
- Quick release input terminal blocks •




Steel DIN Rail Clip for Secure Attachment

Specifications

	DSB1000	DSB2000
Inputs	Terminal block 4 inputs per channel (A, B, C, GND)	
Switched Output	2 BNC jacks & 3 Pin Connector (see options below)	
Continuous Output	Multi-pin connector for interface with online systems (optional) Requires JB931-3A	
Rating	NEMA 4X (IP66)	
Door Closure	Snap Latch	Twist Lock
Material	Fiberglass	Stainless Steel
Temperature Rating	-58° to 180° F (-50° to 82° C)	

Ordering Information

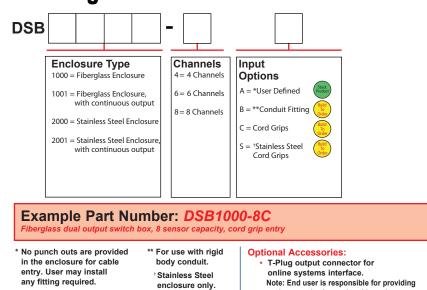



Note: End user is responsible for providing enclosure exit when using this option



Section 3 - Junction Boxes



VIBRATION ANALYSIS HARDWARE