

Dual Output Cable Termination Boxes  
1, 2 Channels

CT142-2A



Product Features

Low-Cost Cable Termination Boxes

Easy access to 1 to 2 channels with attached metal cap covers for superior durability and longevity.



- Connects remotely installed dual output sensors to portable data collectors
- Optional cord grip inputs provide quick and secure cable entry into enclosure (see model CT142-2C photo, left)
- Attached BNC covers keep jacks protected

CT142-2C



Specifications

Inputs	Terminal Block 4 Inputs per channel (A, B, C, GND)
Output	2 BNC Jacks Per Channel Electrically Isolated
Rating	NEMA 4X (IP66)
Door Attachment	4 Screws
Material	Polycarbonate
Screw Torque for Door & Mounting Feet	40-45 in-oz
Temperature Rating	-58° to 180° F (-50° to 82° C)
Resistance	Resistant to Hose Directed Fluid

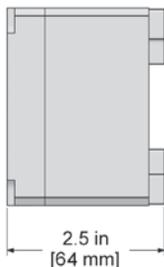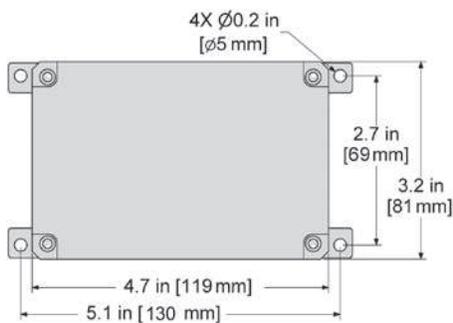

Ordering Information

CT142 -

<b>Enclosure Type</b> Polycarbonate
--

<b>Channels</b> 1 = 1 Channel 2 = 2 Channels	<b>Input Options</b> A = *User Defined B = **Conduit Fitting C = Cord Grips
--	--

Example Part Number: **CT142-2C**

Dual output BNC cable termination box, vibration/temperature, for two dual output sensors, cord grip entry

\* No punch outs are provided in the enclosure for cable entry. User may install any fitting required.

\*\* For use with conduit.  
† Stainless Steel enclosure only.