


CE Certified

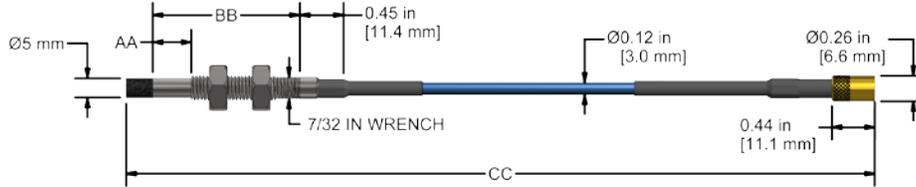

### Product Features

**PRO DP1009 series proximity probes measure shaft vibration and displacement on machinery with fluid film bearings. Durable PPS over-molded probe tips withstand harsh conditions when monitoring critical machinery such as turbines and compressors.**

- 5 mm probe tip diameter with 1/4-28 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body and jam nuts

### Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
Sensitivity: -200 mV/mil (-7.87 V/mm) (1 mil = 0.001")
7/32 in wrench flats at cable end of probe body
Miniature 12-32 threaded connector
FEP jacketed cable, available with 304 optional stainless steel armor jacket
IP Rating (Probe) - IP68

### Ordering Information

DP1009  -  -  -  -  -



Case Thread	Unthreaded Case Length	Case Length	Total Length	Connector	Regulatory Approval
01 = 1/4-28 No Armor 02 = 1/4-28 Armor	00 = 0.0 in    40 = 4.0 in	15 = 1.5 in    60 = 6.0 in	05 = 0.5 meter	01 = mini coax, with connector protector 02 = mini coax	00 = CE Certified
	05 = 0.5 in    50 = 5.0 in	20 = 2.0 in    70 = 7.0 in	10 = 1.0 meter		
	10 = 1.0 in    60 = 6.0 in	30 = 3.0 in    80 = 8.0 in	50 = 5.0 meter		
	20 = 2.0 in    70 = 7.0 in	40 = 4.0 in    95 = 9.5 in	70 = 7.0 meter		
	30 = 3.0 in    80 = 8.0 in	50 = 5.0 in			

All Products Are Built To Order

Example Part Number: **DP100901-05-15-05-01-00**

No armor, 0.5 inch unthreaded case length, 1.5 inch case length, 0.5 meter total length, mini coax with connector protector, CE certified



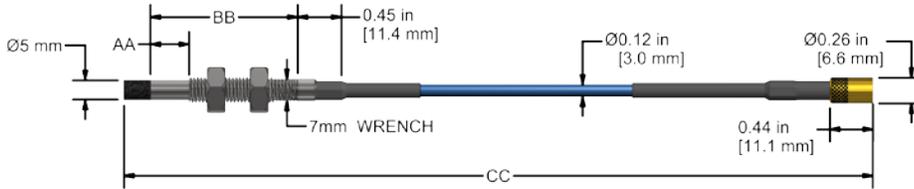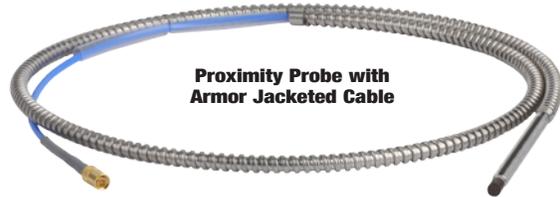

### Product Features

**PRO DP1009 series proximity probes measure shaft vibration and displacement on machinery with fluid film bearings. Durable PPS over-molded probe tips withstand harsh conditions when monitoring critical machinery such as turbines and compressors.**

- 5 mm probe tip diameter with M8x1 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body and jam nuts

### Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
Sensitivity: -200 mV/mil (-7.87 V/mm) (1 mil = 0.001")
7 mm wrench flats at cable end of probe body
Miniature 12-32 threaded connector
FEP jacketed cable, available with optional 304 stainless steel armor jacket
IP Rating (Probe) – IP68



### Ordering Information

DP1009  -  AA -  BB -  CC -  -  0 0


Case Thread	Unthreaded Case Length		Case Length		Total Length	Connector	Regulatory Approval
03 = M8x1 No Armor	00 = 0 mm	08 = 80 mm	03 = 30 mm	10 = 100 mm	05 = 0.5 meter	01 = mini coax, with Connector Protector 02 = mini coax	00 = CE Certified
	01 = 10 mm	10 = 100 mm	04 = 40 mm	12 = 120 mm	10 = 1.0 meter		
	02 = 20 mm	12 = 120 mm	05 = 50 mm	14 = 140 mm	50 = 5.0 meter		
04 = M8x1 Armor	03 = 30 mm	14 = 140 mm	06 = 60 mm	16 = 160 mm	70 = 7.0 meter		
	04 = 40 mm	16 = 160 mm	07 = 70 mm	18 = 180 mm			
	05 = 50 mm	18 = 180 mm	08 = 80 mm	20 = 200 mm			
	06 = 60 mm	20 = 200 mm		22 = 220 mm			
	07 = 70 mm	22 = 220 mm		25 = 250 mm			

NOTE: 10 mm increments up to 30 mm less than the case length

NOTE: Highlighted lengths are stocked for shorter lead times

**Example Part Number: DP100903-01-10-05-02-00**

No armor, 10 mm unthreaded case length, 100 mm case length, 0.5 meter total length, mini coax connector, CE certified

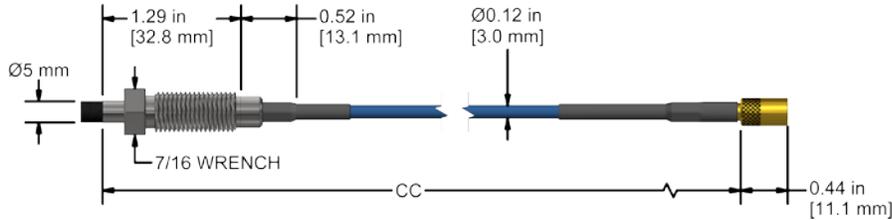

### Product Features

**PRO DP100906 series proximity probes measure shaft vibration and displacement on machinery with fluid film bearings. Durable PPS over-molded probe tips withstand harsh conditions when monitoring critical machinery such as turbines and compressors.**

- 5 mm probe tip diameter with 3/8-24 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body and integral jam nut

### Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
Sensitivity: -200 mV/mil (-7.87 V/mm) (1 mil = 0.001")
7/16 in wrench flats on front of probe
Miniature 12-32 threaded connector
FEP jacketed cable
IP Rating (Probe) – IP68

### Ordering Information

DP1009 **06** - **02** - **12** - **CC** - **02** - **00**



Case Thread	Unthreaded Case Length	Case Length	Total Length	Connector	Regulatory Approval
<b>06</b> = reverse mount with 3/8-24 threaded body	<b>02</b> = 0.2 in	<b>12</b> = 1.2 in	<b>05</b> = 0.5 meter <b>10</b> = 1.0 meter <b>50</b> = 5.0 meter <b>70</b> = 7.0 meter	<b>02</b> = mini coax	<b>00</b> = CE Certified
NOTE: Highlighted lengths are stocked for shorter lead times					



**Example Part Number: DP100906-02-12-05-02-00**

Reverse mount with 3/8-24 threaded body, 0.2 inch unthreaded case length, 1.2 inch case length, 0.5 meter total length, mini coax connector, CE certified



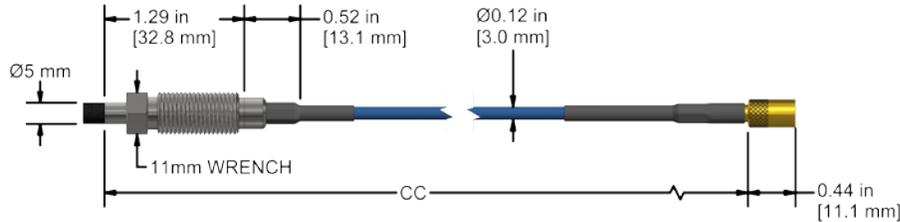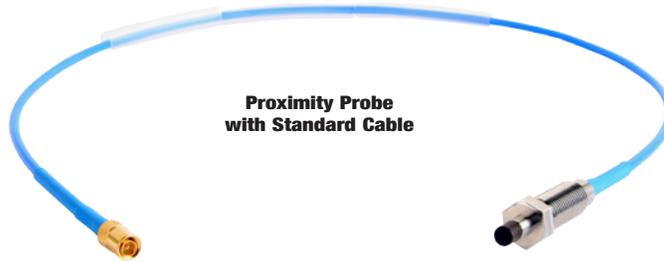

### Product Features

**PRO DP100907 series proximity probes measure shaft vibration and displacement on machinery with fluid film bearings. Durable PPS over-molded probe tips withstand harsh conditions when monitoring critical machinery such as turbines and compressors.**

- 5 mm probe tip diameter with M10x1 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body and integral jam nut

### Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
Sensitivity: -200 mV/mil (-7.87 V/mm) (1 mil = 0.001")
11 mm wrench flats on front of probe
Miniature 12-32 threaded connector
FEP jacketed cable
IP Rating (Probe) – IP68

### Ordering Information


DP1009 **07** - **05** - **30** - **CC** - **02** - **00**

Case Thread	Unthreaded Case Length	Case Length	Total Length	Connector	Regulatory Approval
07 = reverse mount with M10x1 threaded body	05 = 5 mm	30 = 30 mm	05 = 0.5 meter 10 = 1.0 meter 50 = 5.0 meter 70 = 7.0 meter	02 = mini coax	00 = CE Certified
NOTE: Highlighted lengths are stocked for shorter lead times					



**Example Part Number: DP100907-05-30-05-02-00**

Reverse mount with M10x1 threaded body, 5 mm unthreaded case length, 30 mm case length, 0.5 meter total length, mini coax connector, CE certified

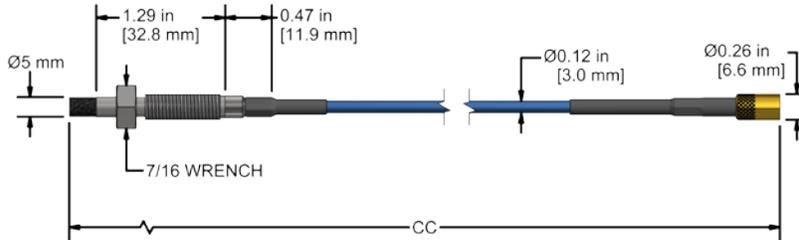

### Product Features

**PRO DP100911 series proximity probes measure shaft vibration and displacement on machinery with fluid film bearings. Durable PPS over-molded probe tips withstand harsh conditions when monitoring critical machinery such as turbines and compressors.**

- 5 mm probe tip diameter with 1/4-28 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body and integral jam nut

### Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
Sensitivity: -200 mV/mil (-7.87 V/mm) (1 mil = 0.001")
7/16 in wrench flats on front of probe
Miniature 12-32 threaded connector
FEP jacketed cable
IP Rating (Probe) – IP68

### Ordering Information

DP1009 1 1 - 0 2 - 1 2 - CC - 0 2 - 0 0


Case Thread	Unthreaded Case Length	Case Length	Total Length	Connector	Regulatory Approval
11 = reverse mount with 1/4-28 threaded body	02 = 0.2 in	12 = 1.2 in	05 = 0.5 meter 10 = 1.0 meter 50 = 5.0 meter 70 = 7.0 meter	02 = mini coax	00 = CE Certified
NOTE: Highlighted lengths are stocked for shorter lead times.					



**Example Part Number: DP100911-02-12-05-02-00**  
 Reverse mount with 1/4-28 threaded body, 0.2 inch unthreaded case length, 1.2 inch case length, 0.5 meter total length, mini coax connector, CE certified



**Lifetime Warranty on Materials & Workmanship**

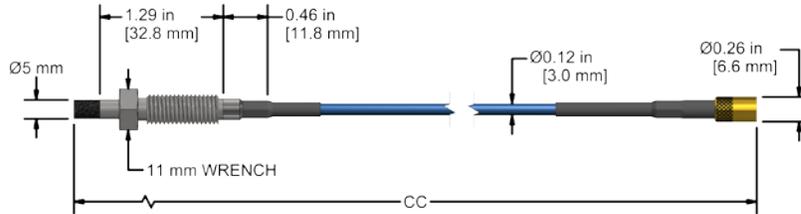

### Product Features

**PRO DP100912 series proximity probes measure shaft vibration and displacement on machinery with fluid film bearings. Durable PPS over-molded probe tips withstand harsh conditions when monitoring critical machinery such as turbines and compressors.**

- 5 mm probe tip diameter with M8x1 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body and integral jam nut

### Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
Sensitivity: -200 mV/mil (-7.87 V/mm) (1 mil = 0.001")
11 mm wrench flats on front of probe
Miniature 12-32 threaded connector
FEP jacketed cable
IP Rating (Probe) – IP68

### Ordering Information

DP1009 1 2 - 0 5 - 3 0 - CC - 0 2 - 0 0

Case Thread	Unthreaded Case Length	Case Length	Total Length	Connector	Regulatory Approval
12 = reverse mount with M8x1 threaded body	05 = 5 mm	30 = 30 mm	05 = 0.5 meter 10 = 1.0 meter 50 = 5.0 meter 70 = 7.0 meter	02 = mini coax	00 = CE Certified
NOTE: Highlighted lengths are stocked for shorter lead times					



**Example Part Number: DP100912-05-30-05-02-00**

Reverse mount with M8x1 threaded body, 5 mm unthreaded case length, 30 mm case length, 0.5 meter total length, mini coax connector, CE certified