


DC100730 Series

PRO 11 mm Series, Extension Cable


Standard Cable



Armored Cable

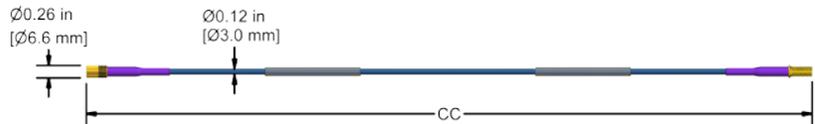

Connector Protector Option

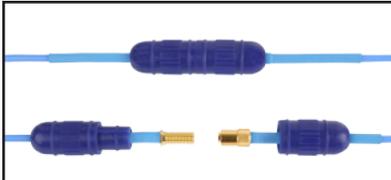

Protective Adhesive Gel



Product Features

PRO DC100730 extension cables combine with PRO DP1007 series probes and PRO DD1007 series drivers to form a complete assembly to monitor vibration and shaft position.

- Matched with PRO 11 mm probes and driver assemblies for cost effective and reliable measurements
- Excellent chemical resistance
- Protective sleeves to cover connections (optional)

Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
 Connector pull strength up to 70 lbs
 Matched to 5 & 9 meter system lengths
 Male & female miniature 12-32 threaded connectors
 FEP jacketed cable, available with optional 304 stainless steel armor jacket

Ordering Information

DC100730

CCC

00

System Length
(REFERENCE ONLY)

50 = 5.0 meter

90 = 9.0 meter

Total Length of Extension Cable	Armor	Regulatory Approval
040 = 4.0 meter	00 = No	00 = CE Certified
080 = 8.0 meter	01 = Yes	
	02 = No, with connector protector	
	03 = Yes, with connector protector	



Example Part Number: DC100730-040-00-00
 4.0 meter total length, no armor, CE certified



PROTECTION & RELIABILITY INSTRUMENTS

Lifetime Warranty on Materials & Workmanship