


DD100880 Series

PRO 25 mm, Driver Assembly



Panel Mount Option
(Shown Above)

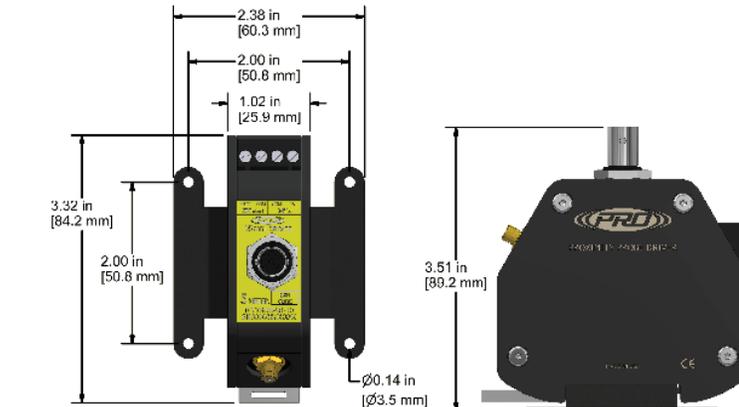

Panel Mount Option
(Shown Above)

Product Features

Driver assembly DD100880 offers multiple options for mounting and easy connections via BNC jack and screw terminals.

- **Flexible system configuration**
- **DC gap and shaft vibration signals available via BNC jack and terminal block for analysis or monitoring**
- **Multiple mounting options (DIN rail, panel or none)**

TERMINAL BLOCK WIRING

Connections	Functions
V _t	-24 VDC
Com	+24 VDC
Com	+24 VDC
V _{out}	-20 mV/mil, DC Gap

Specifications

Temperature Range: -49°F (-45°C) to 185°F (85°C)
Linear Range: 25 to 525 mils (.63 - 13.33 mm) @ approximately -1.5 to -11.5 VDC
Nominal Voltage Output: -20 mV/mil (-0.787 V/mm)
Input Power/Voltage: -17.5 VDC to -30 VDC
Aluminum enclosure
Miniature 12-32 threaded connector
4 position screw terminals + BNC output

Ordering Information

DD1 880 - -

Calibrated Material	System Length	Mounting Type	Regulatory Approval
00 = 4140 Steel	5 = 5.0 meter	0 = Panel (Mounting Screws Are Not Included)	00 = CE Certified
08 = 1045 Steel	9 = 9.0 meter	1 = DIN	
10 = 17-4 Stainless Steel		2 = None	
11 = 420 Stainless Steel			
12 = 304 Stainless Steel			
13 = 316 Stainless Steel			
20 = 360 Brass Alloy			
30 = AL7075-T			



Example Part Number: DD100880-91-00
4140 Steel, 9 meter system length, DIN mount, CE certified

Lifetime Warranty on Materials & Workmanship

www.ctconline.com

