


Factory Installed Cable Connectors

G3H

3 Socket,
Twist Lock
Mount

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB105, CB112, CB117, CB218

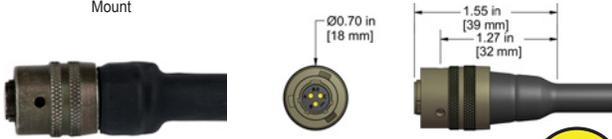


Build To Order

G4H1

4 Socket,
Twist Lock
Mount

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Ch. 1 (+) B = Ch. 2 (+) C = Ch. 3 (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB218

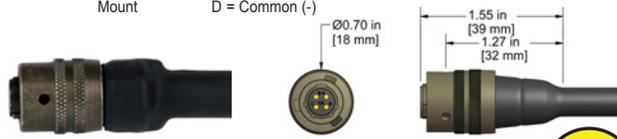


Build To Order

J2A

2 Socket,
mini-MIL
Polycarbonate
Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB206




Build To Order

J4A

4 Socket,
mini-MIL
Polycarbonate
Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB119, CB218



Build To Order

IP66

IP66

J2C

2 Socket,
mini-MIL
Polyurethane
Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	A = Signal (+) B = Common (-)	250° F (121° C)	CB108, CB110, CB206




Build To Order

J4C

4 Socket,
mini-MIL
Polyurethane
Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB119




Build To Order

J2N

2 Socket,
mini-MIL
Nylon
Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB206




Build To Order

J4N

4 Socket,
mini-MIL
Nylon
Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB117, CB119, CB218



Build To Order

IP66

IP66

J2P

2 Socket,
mini-MIL
Polyurethane
Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB206




Build To Order

J4P

4 Socket,
mini-MIL
Polyurethane
Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Ch. Y (+) B = Ch. X (+) C = Ch. Z (+) D = Common (-)	250° F (121° C)	CB105, CB119, CB218

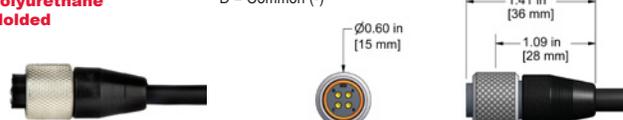

Build To Order

IP66

IP66

