

Bently™ Compatible Adapters: CMX2600 Series

SECTION 2 - CABLES & CONNECTORS
Bently™ Compatible Adapters: CMX2600 Series

CMX2601

24 Channel Breakout

24 Channel breakout adapter for use with Bently Rack 25 Pin connectors. Pin 1 is shared common, each breakout cable identified by matching Pin number in connector. Standard model 3 feet with tinned leads. Other terminations available: F, E, Z.




For Bently CMX2601-003-L only.

CMX2602

4 Channel Keyphaser Breakout

CMX2602A, 4 Channel keyphaser breakout adapter for use with Bently Rack. DB9 connector to 4 BNC plugs. 3 feet (.91 m) length.

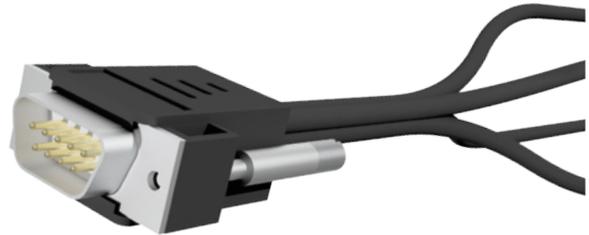

Other lengths and terminations available. See below for ordering details:

Ordering Information

CMX2602 - -

Length	Termination
0-10 feet	Z, L, E, F

Specialty Adapters: CMX2700 Series

CMX2701

Dual Channel Acceleration

Channel A and B Inputs. Acceleration input only.



For ACOEM® Falcon™ Data Collector



CMX2702

Single Channel Acceleration

4 socket M12 connector to 6 Pin Ecta connector. Tachometer input only. 24 Inch Length.



For ACOEM® Falcon™ Data Collector



Backed by our Unconditional Lifetime Warranty

www.ctconline.com

